



Brief Description

The 20ft ELA Offshore ALLROUNDER is specially designed for offshore use and is **applicable for non-hazardous areas** on all kinds of offshore units such as platforms, rigs, jack-up barges, accommodation barges, pontoons and all types of supply vessels.


Every Container is basically equipped with...

- + two A60 outer doors with integrated A60 windows
- + A60 insulation in walls and ceiling
- + noise reduction of 45 dB
- + a prewiring for connection to existing PA/GA-System
- + power and internet sockets, switches, lights, loudspeakers
- + HVAC-System for heating and cooling (-20° to +40 °C)
- + fire dampers and fire extinguishers

The Toilet Container is additionally equipped with...

- + toilets
- + urinals
- + wash basins
- + coat hooks
- + 1x 5 L / 1.3 US gallon water heater
- + wastewater connection: DN 100 mm / 4 in.
- + freshwater connection: 3/4 in. with a max. pressure of 4 bar / 58 psi
- + electrical connection value approx. 8 - 10 kW

Features

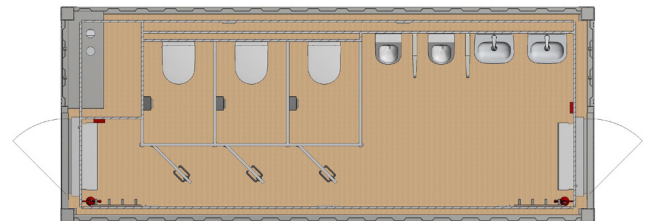

Certificates and Approvals

- + DNV 2.7-1 / EN 12079-1 / ISO 10855
- + ISO-Norm-R-668, High Cube
- + CSC

Dimensions

- + L 6058 mm x W 2438 mm x H 2896 mm
- L 20 ft x W 8 ft x H 9 ft 6 in
- + Inside height: 2450 mm / 8 ft

Weight

- + MGW offshore: 8.2 t / 18,072 lbs.
- + Tare weight: 7.7 t / 16,976 lbs.

Electrical Power Requirements

- + Main outside connection: 400 V / 50 Hz
- Alternative: 440 V or 460 V / 60 Hz
- + Inside power: 230 V
- Alternative: 110 V
- Electrical installation according to VDE 0100.